


Allow 55" of clearance above top deck level

Voyager II Cargo Lift Dimensions

A	HAND RAIL HEIGHT	46"
B	OUTSIDE SIDE-TO-SIDE	54.25"
C	BACK OF BEAMS TO CAGE FRONT (OUTSIDE)	60.75"
D	BACK OF CAGE TO FRONT OF CAGE (OUTSIDE)	54.25"
E	BACK TO FRONT (INSIDE)	48.25"
F	BEAM WIDTH (OUTSIDE) (CENTER TO CENTER)	32" 29"
G	BACK OF POWER HEAD TO CAGE FRONT (OUTSIDE)	64.75"
H	FLOOR THICKNESS	4"

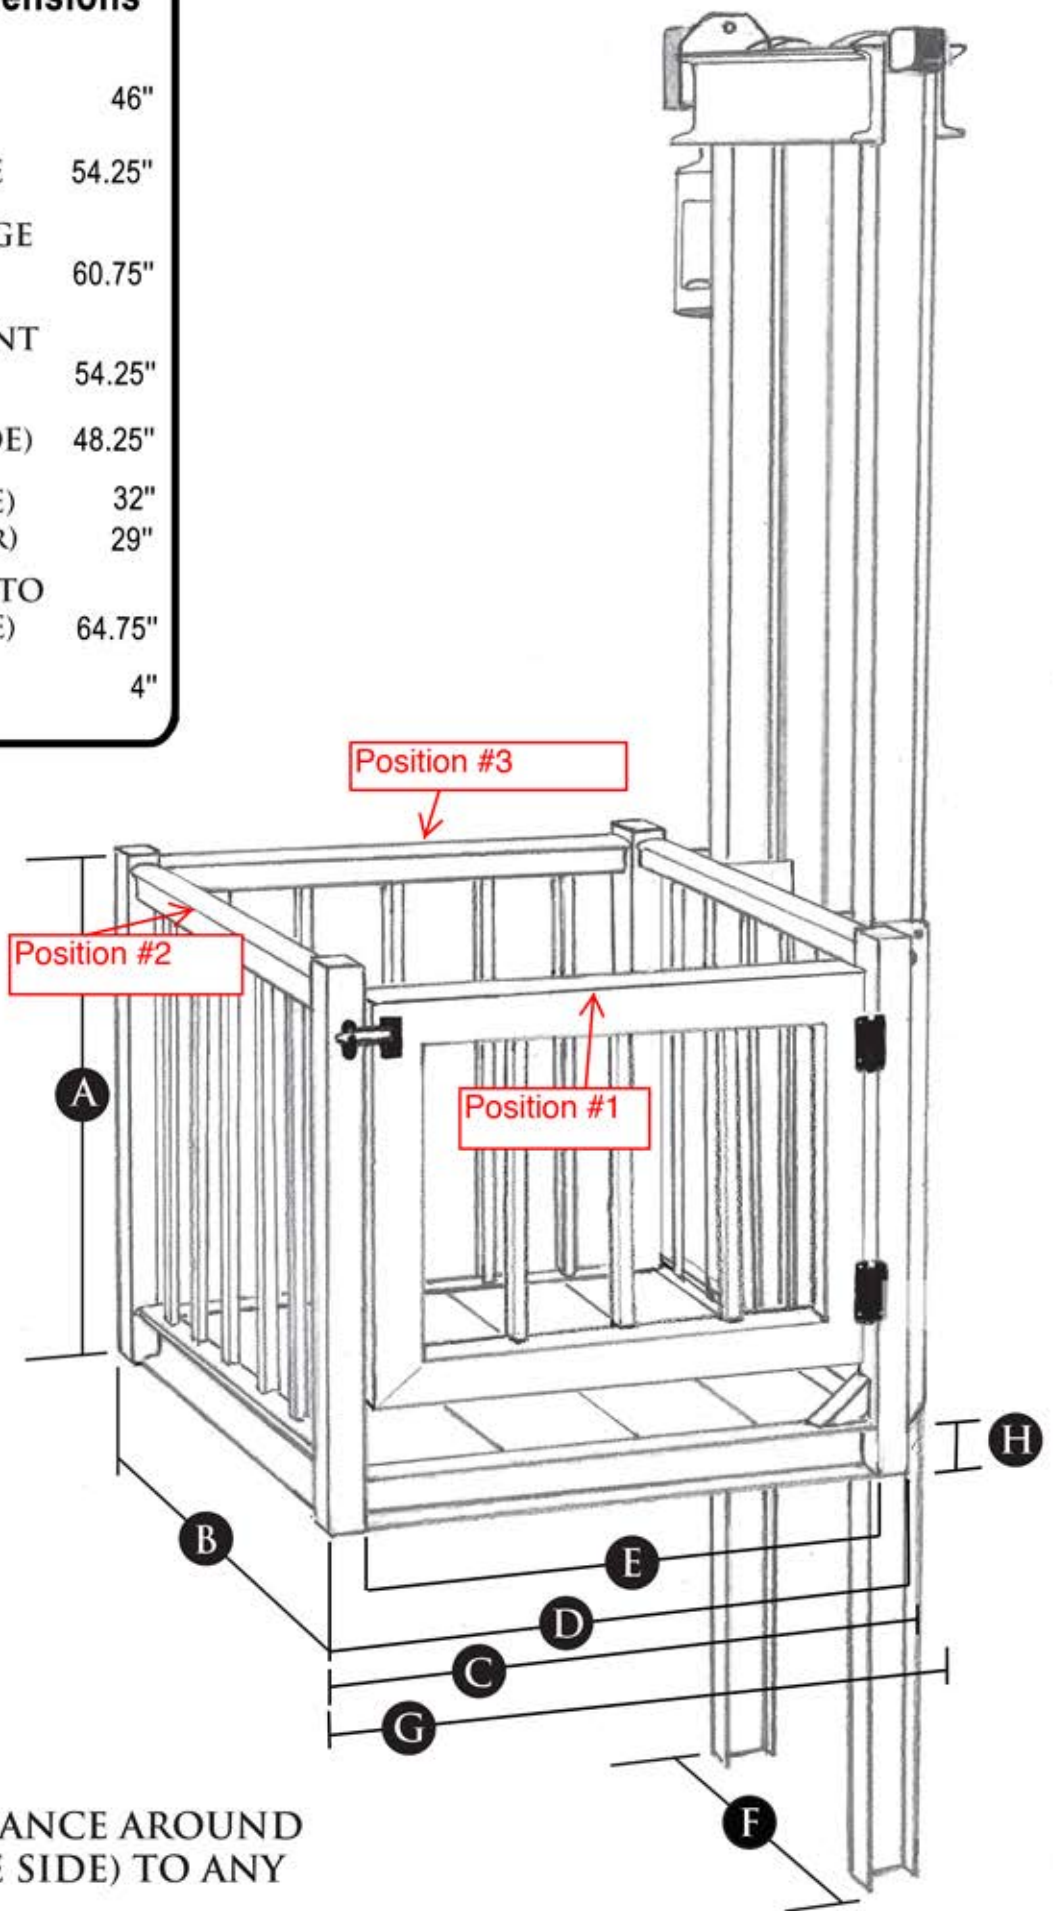

Gate opening locations are determined by the BEAM SIDE.

Looking into the basket from behind the beams:

- #1 - is on the left of the beams
- #2 - is across from the beams
- #3 - is on the right of the beams.

This diagram shows a #1 gate opening location.

- ALLOW 1.5" CLEARANCE AROUND CAGE (2" ON GATE SIDE) TO ANY STRUCTURE